



| Type | Width [mm] | Height [mm] | Depth [mm] | Connections spacing [mm] | Connections distance from the wall [mm] | Brackets spacing [mm] | Heating surface [m ²] | Weight [kg] | Capacity [dm ³] | Power (7.5/6.5/20 °C) [W] | Power (7.5/6.5/24 °C) [W] | Power (5.5/4.5/24 °C) [W] | Electric heater maximal power [W] |
|--------|------------|-------------|------------|--------------------------|---|-----------------------|-----------------------------------|-------------|-----------------------------|---------------------------|---------------------------|---------------------------|-----------------------------------|
| | W | H | D | C | B | A | | | | | | | |
| Q-608 | 595 | 812 | 101-106 | 500 | 52-57 | 525 | 0,75 | 10,2 | 3,5 | 392 | 354 | 176 | 300 |
| QX-608 | 595 | 812 | 101-106 | 50 | 78-83 | 525 | 0,75 | 10,3 | 3,5 | 392 | 354 | 176 | 300 |
| Q-611 | 595 | 1097 | 101-106 | 500 | 52-57 | 525 | 1,08 | 14,4 | 4,9 | 553 | 498 | 245 | 300 |
| QX-611 | 595 | 1097 | 101-106 | 50 | 78-83 | 525 | 1,08 | 14,5 | 4,9 | 553 | 498 | 245 | 300 |
| Q-616 | 595 | 1667 | 101-106 | 500 | 52-57 | 525 | 1,70 | 22,2 | 7,7 | 849 | 765 | 375 | 600 |
| QX-616 | 595 | 1667 | 101-106 | 50 | 78-83 | 525 | 1,70 | 22,3 | 7,7 | 849 | 765 | 375 | 600 |

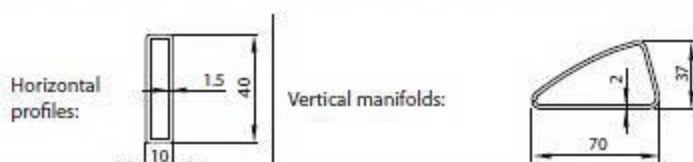

| | | | | |
|-----------------------|---|---|--|---|
| Finish and guarantee: | – standard: phosphatizing + polyester-epoxy lacquer; 5 year guarantee; – on request: electrophoresis + polyester-epoxy lacquer; 10 year guarantee; | | | |
| Mounting brackets: | – set for assembly on the wall – brackets in the colour of a towel rail | | | |
| Valve: | for a separate order – page 25 | | | |
| Heater : | for a separate order – page 24 | | | |
| Working pressure: | 4 bars | | | |
| Maximal temperature: | 95 °C | | | |
| Connections: | <table border="0" style="width: 100%;"> <tr> <td style="text-align: center;"> </td> <td style="text-align: center;"> </td> <td style="vertical-align: top;"> – inner threads G 1/2 – air-vent plug G1/8 hidden behind </td> </tr> </table> | | | – inner threads G 1/2 – air-vent plug G1/8 hidden behind |
| | | – inner threads G 1/2 – air-vent plug G1/8 hidden behind | | |

QX



Q

