


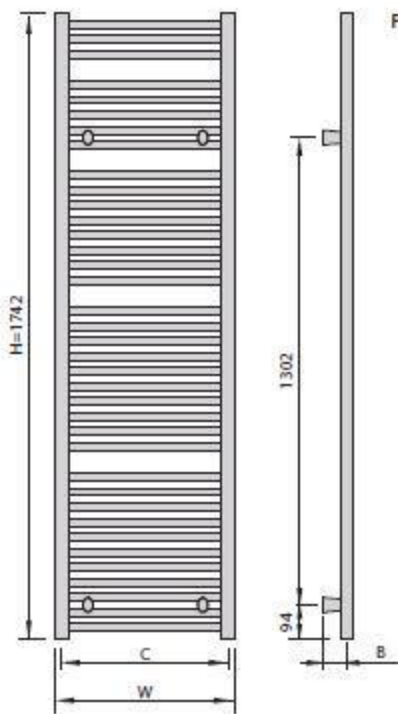


Type	Width [mm]	Height [mm]	Depth [mm]	Connections spacing [mm]	Connections distance from the wall [mm]	Brackets spacing [mm]	Heating surface [m <sup>2</sup> ]	Weight [kg]	Capacity [dm <sup>3</sup> ]	Power (75/65/20°C) [W]	Power (75/65/24°C) [W]	Power (55/45/24°C) [W]	Electric heater maximal power [W]
	W	H	D	C	B	A							
P-308	340	776	78-98	290	63-83	200	0,48	5,3	2,7	274	247	121	-
PX-308	340	776	78-98	50	63-83	200	0,48	5,4	2,7	274	247	121	-
P-312	340	1154	78-98	290	63-83	200	0,71	7,7	4,0	406	365	176	300
PX-312	340	1154	78-98	50	63-83	200	0,71	7,8	4,0	406	365	176	300
P-408	458	776	78-98	408	63-83	300	0,61	6,5	3,2	359	323	159	300
PX-408	458	776	78-98	50	63-83	300	0,61	6,6	3,2	359	323	159	300
P-412	458	1154	78-98	408	63-83	300	0,91	9,5	4,8	527	474	230	300
PX-412	458	1154	78-98	50	63-83	300	0,91	9,6	4,8	527	474	230	300
P-417	458	1742	78-98	408	63-83	300	1,39	14,3	7,4	828	744	357	600
PX-417	458	1742	78-98	50	63-83	300	1,39	14,4	7,4	828	744	357	600
P-608	608	776	78-98	558	63-83	450	0,78	8,0	4,0	456	411	201	300
PX-608	608	776	78-98	50	63-83	450	0,78	8,1	4,0	456	411	201	300
P-612	608	1154	78-98	558	63-83	450	1,16	11,7	5,9	669	602	293	600
PX-612	608	1154	78-98	50	63-83	450	1,16	11,8	5,9	669	602	293	600
P-617	608	1742	78-98	558	63-83	450	1,77	17,8	9,1	1051	944	453	900
PX-617	608	1742	78-98	50	63-83	450	1,77	17,9	9,1	1051	944	453	900
P-808	764	776	78-98	714	63-83	550	0,95	9,6	4,7	552	497	243	300
PX-808	764	776	78-98	50	63-83	550	0,95	9,7	4,7	552	497	243	300
P-812	764	1154	78-98	714	63-83	550	1,42	14,1	7,1	811	730	355	600
PX-812	764	1154	78-98	50	63-83	550	1,42	14,2	7,1	811	730	355	600
P-817	764	1742	78-98	714	63-83	550	2,17	21,4	10,8	1274	1144	549	900
PX-817	764	1742	78-98	50	63-83	550	2,17	21,5	10,8	1274	1144	549	900

PSD  
the possibility of assembling  
to the wall as a partition.

PX draft as of  
PXCh on the  
page 17



Finish and guarantee:

- standard: phosphatizing + polyester-epoxy lacquer;  
5 year guarantee;  
- on request: electrophoresis + polyester-epoxy lacquer;  
10 year guarantee;

Mounting brackets:

set for assembly on the wall; brackets in the colour of a towel rail

Valve:

for a separate order – page 25

Heater:

for a separate order – page 24

Accessories:

for a separate order – page 26

Working pressure:

4 bars

Maximal temperature:

95 °C

Connections:

4 5 – inner thread G 1/2  
1 8 – air-vent plug G1/2  
screwed in the upper  
hole of the collector,  
included

PX  
1 8 – inner threads G 1/2  
– air-vent plug G1/8  
hidden behind

Remarks:

lacquered towel rails in different colours than white have  
changed brackets' type and spacing.

