



Type	Width [mm]	Height [mm]	Depth [mm]	Connections spacing [mm]	Connections distance from the wall [mm]	Brackets spacing [mm]	Heating surface [m <sup>2</sup> ]	Weight [kg]	Capacity [dm <sup>3</sup> ]	Power (7.5/6.5/20 °C) [W]	Power (7.5/6.5/24 °C) [W]	Power (5.5/4.5/24 °C) [W]	Electric heater maximal power [W]
	W	H	D	C	B	A							
Q-608	595	812	101-106	500	52-57	525	0,75	10,2	3,5	392	354	176	300
QX-608	595	812	101-106	50	78-83	525	0,75	10,3	3,5	392	354	176	300
Q-611	595	1097	101-106	500	52-57	525	1,08	14,4	4,9	553	498	245	300
QX-611	595	1097	101-106	50	78-83	525	1,08	14,5	4,9	553	498	245	300
Q-616	595	1667	101-106	500	52-57	525	1,70	22,2	7,7	849	765	375	600
QX-616	595	1667	101-106	50	78-83	525	1,70	22,3	7,7	849	765	375	600

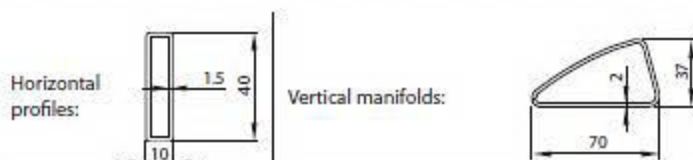

Finish and guarantee:	– standard: phosphatizing + polyester-epoxy lacquer; 5 year guarantee; – on request: electrophoresis + polyester-epoxy lacquer; 10 year guarantee;			
Mounting brackets:	– set for assembly on the wall – brackets in the colour of a towel rail			
Valve:	for a separate order – page 25			
Heater :	for a separate order – page 24			
Working pressure:	4 bars			
Maximal temperature:	95 °C			
Connections:	<table border="0" style="width: 100%;"> <tr> <td style="text-align: center;"> </td> <td style="text-align: center;"> </td> <td style="vertical-align: top;">           – inner threads G 1/2            – air-vent plug G1/8 hidden behind         </td> </tr> </table>			– inner threads G 1/2 – air-vent plug G1/8 hidden behind
		– inner threads G 1/2 – air-vent plug G1/8 hidden behind		

QX



Q

